




1. Remove parts from the shipping package and check contents to confirm you have: MiniRoller mat, acrylic front stop, dividers, and any optional items on the packing slip.

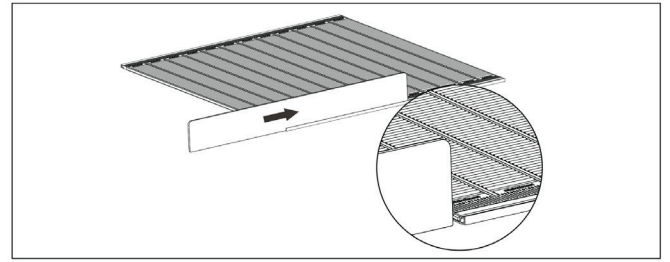


2. Slide the acrylic front stop into the front channel of the MiniRoller mat.

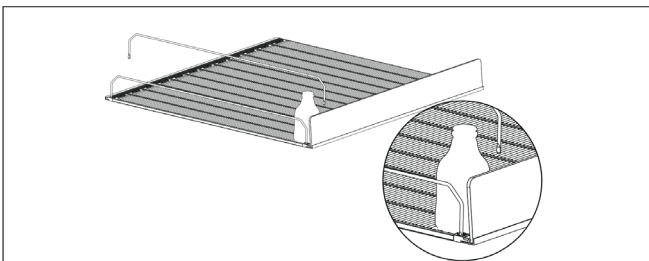


3. Install one divider on the left side. Place one SKU of your planogram on the mat and install the next divider to the right of the product.

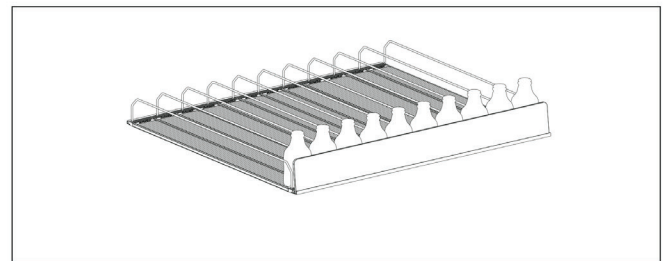


4. Continue placing product and dividers to create lanes for the rest of your planogram. Be sure to place all dividers into the same slot numbers on the MiniRoller mat.

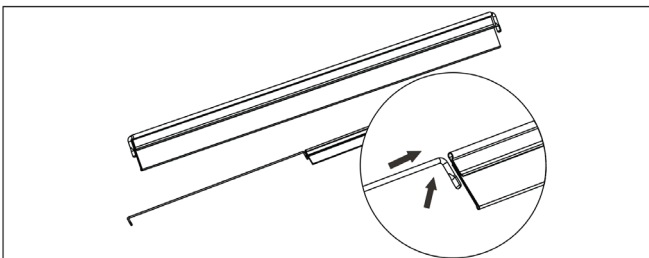


5. If purchased as an option, assemble the rear planogram sleeve by sliding onto the rear stop.

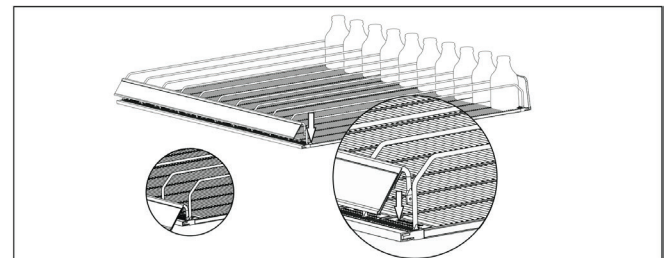

6. If purchased, install the rear planogram sleeve in the slots next to the wire lane dividers as shown.

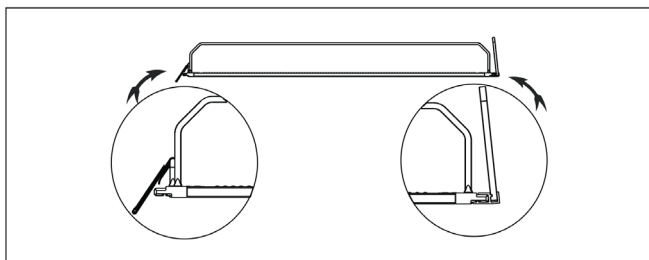

7. If purchased as an option, insert the rear stop as shown.

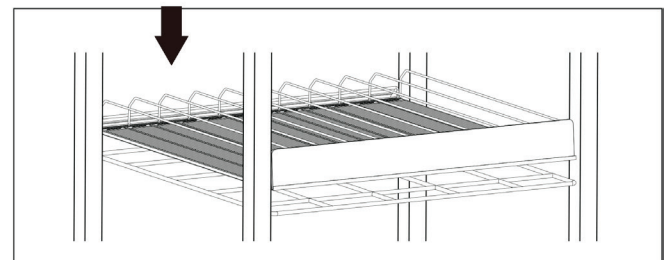

8. Remove product and set MiniRoller on the wire shelf at the desired angle. Adjust the angle by adjusting the riser at the back.

STOCKING PRODUCT

With MiniRoller, stocking shelves has never been easier. Set product into each lane GENTLY. MiniRoller does all the work of moving the product forward in the lane.

It is important to avoid forcing product into the lane or dropping product on top of the MiniRoller. Strong force could damage the rollers so they can't move properly.

Pay close attention when stocking heavy merchandise. Place it gently onto the MiniRoller to avoid damage to the rollers.

MAINTENANCE/CLEANING

Occasional clean-up is needed to keep MiniRoller rolling smoothly. For routine maintenance, simply wipe with a dry cloth at least once every 30 days (mark your calendar!) to remove anything that could jam the rollers.

For spills, use a dry cloth to absorb the liquid followed by a damp cloth to thoroughly clean. No need for soap or detergents.

These simple routines will keep your MiniRoller functioning for years to come.